



Raising the standard through innovation

Bucket-Guzzler® Hand Pump GB-0400D



- **Durable, lightweight Guzzler hand pump**
 - 8.0GPM (at 72 cpm)
 - Rugged aluminum handle
 - Available with Buna-N or Viton diaphragm and valves
 - Clamp ring adjusts to 12 different orientations
 - Optional aluminum clamp ring for added durability
- **5 gallon pail & lid**
 - 0.70 mil plastic High Density Polyethylene (HDPE)**
 - Optional 26-gauge steel with re-sealable lever-locking lid
- **Multiple hose options**
 - 1-in hose slips easily over standard pump inlet (available in 4ft, 6ft, 10ft lengths)
 - Optional male garden hose pump inlet accommodates standard garden hose
 - Optional 1/4-in ID hose for pumping from small openings
- **Multiple 1-in hose end options**
 - Strainer to prevent pump blockages
 - Check valve for pumping up large distances

- **Collect spills the easy way !**
- **Bosworth Guzzler hand pump empties directly into 5 gallon pail**
- **Available with 4', 6' or 10' of 1-in ID hose**
- **Available with strainer at end of hose to prevent pump clogging**
- **Ideal for collecting small contained spills***
 - *Service station spill buckets & catch basins*
 - *Oily marine bilge*



Hose stores neatly inside bucket when not in use.



Available with optional steel pail with lever-locking lid

Pump Performance

| | |
|-------------------------|--|
| Flow Rate | Per minute ¹ : 6.5 Gal (24.6L) Per stroke: 0.44 Qt (0.42L) |
| Max Lift | 12 ft (3.7 m) 22 ft (6.7 m) with check valve |
| Max Service Temp | 212°F (100°C) |

¹: at 60 cycles per minute


Valve Options



Flapper — General purpose liquid transfer.



Duckbill — For dirty liquid and sewage. Permits mounting in any position.

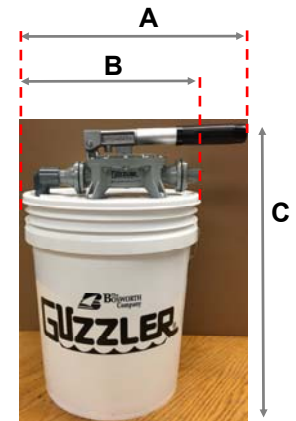

| | in | cm |
|---------------|-----------------|-----------------|
| A | 15 | 38.0 |
| B | 12 | 30.4 |
| C | 19 | 48.2 |
| Weight | HPDE Pail | Steel Pail |
| w/4 ft hose | 4.8 lb / 2.2 kg | 4.8 lb / 2.2 kg |
| w/6 ft hose | 5.2 lb / 2.4 kg | 5.2 lb / 2.4 kg |
| w/10 ft hose | 5.8 lb / 2.6 kg | 5.8 lb / 2.6 kg |

Specifications / Options

| | |
|-------------------------------|--|
| Pump Body & Ports* | Acetal (POM) Copolymer / Gray |
| Pump Handle | Aluminum: Horizontal/Silver, Horizontal/Black, Vertical (Removable)/Silver |
| Pump Valves * | Flapper (Buna N, Neoprene, Viton), Duckbill (Buna-N) |
| Pump Diaphragm* | Buna-N, Neoprene, Viton |
| Pail & Lid* | High Density Polyethylene (HDPE), 26-gauge Steel |
| Hose* | 1-in ID PVC Vinyl, wire reinforced; temp range -10°F to 160°F |

Additional Optional Clamp Rings



Epoxy-coated Aluminum for reinforcement against vigorous pumping



Epoxy-coated Aluminum with Stop Brackets to prevent over-stroking

**** Not suitable for long-term storage of fuels or oils**

* In contact with fluid

930 Waterman Avenue
East Providence, RI 02914
(401) 438-1110 • fax (401) 438-2713
toll-free (888) 438-1110 • www.thebosworthco.com

Guzzler®, Sea-lect® and SapCheck® are registered trademarks of The Bosworth Company



Guzzler® Hand Pump GB-0400D



Example: GB-0400D-111-01-04-050

- Guzzler Hand Pump mounted to Pail
- Model style #0400D: Acetal Body, Opposite Side Ports
- Horizontal Handle (Silver)
- Buna-N Flapper Valves
- Buna Diaphragm
- Acetal Plastic Clamp Ring
- Hose Strainer
- 4 ft of 1-in PVC Hose
- 5 Gallon Pail
- Pail material: HDPE (High Density Polyethylene)

| Guzzler Product | |
|---------------------------|------|
| Option | Code |
| Hand Pump Mounted to Pail | GB |

| Pump Style (Family) | |
|-------------------------|-------|
| Option | Code |
| Acetal, Opp. Side Ports | 0400D |

| Handle | |
|-----------------------------|------|
| Option | Code |
| Horizontal/Silver | 1 |
| Vertical/Silver (Removable) | 4 |

| Valves | |
|-------------------|------|
| Option | Code |
| Flapper (Buna-N) | 1 |
| Flapper (Viton) | 4 |
| Duckbill (Buna-N) | 6 |

| Diaphragm | |
|--------------|------|
| Option | Code |
| Buna Nitrile | 1 |
| Buna-N 3-Ply | 2 |
| Viton | 4 |

GB - 0400D - 1 1 1 - 0 1 - 04 - 05 0

| Clamp Ring | |
|-----------------------------------|------|
| Option | Code |
| Acetal Plastic | 0 |
| Epoxy-coated Alum | 1 |
| Epoxy-coated Alum w/Stop Brackets | 4 |


| Hose End | |
|--------------------------------|------|
| Option | Code |
| None | 0 |
| Strainer | 1 |
| Strainer/Check Valve (Flapper) | 2 |
| Check Valve (Flapper) | 3 |

| Hose Option* | |
|--------------------------------------|------|
| Option | Code |
| No hose; Male Garden Hose Pump Inlet | 00 |
| 1/4-in id hose, 3 ft | 43 |
| 1-in id hose, 4 ft | 04 |
| 1-in id hose, 6 ft | 06 |
| 1-in id hose, 10 ft | 10 |

| Pail Capacity | |
|---------------|------|
| Option* | Code |
| 5 Gal | 05 |

| Pail Material | |
|---------------|------|
| Option | Code |
| HDPE | 0 |
| Steel | 1 |

* Custom hose lengths available. Contact Factory.

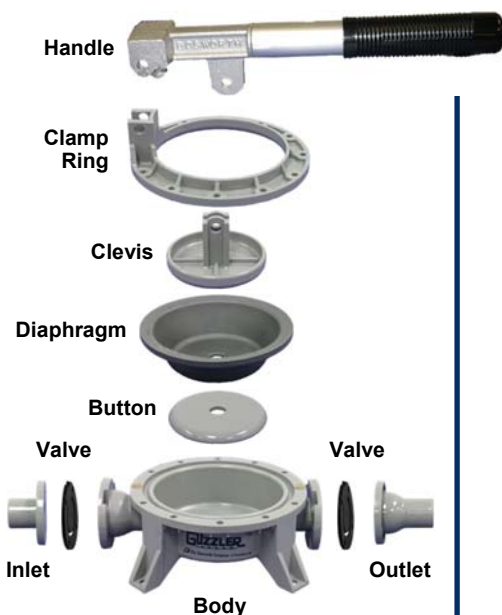

930 Waterman Avenue, East Providence, RI 02914
 (401) 438-1110 • fax (401) 438-2713
 toll-free (888) 438-1110 • www.thebosworthco.com