





Guzzler Hand Pump Installation: Flush Mount Pumps

GH-M400D, GH-M450D, GH-M500D

The “M-series” Guzzler hand pumps can be mounted beneath a deck or behind a wall. These pumps feature a removable vertically-operated handle as well as a trim ring. The trim ring is used to cover the deck or wall opening for the pump when the pump is not in operation and the handle is removed. The trim ring is available in either black or white color.

To mount this style pump, position the trim ring on the deck or wall behind which you want to mount the pump.¹ Use the trim ring to mark the four screw holes and the center hole. Once these holes have been drilled, position the trim ring on the wall or deck with the pump positioned behind. Using the four mounting screws provided, fasten the trim ring to the pump, passing the screws through the four mounting holes in the wall/deck.

Pump is mounted so that trim ring is on outside of wall or deckplate and pump intermediate ring is behind wall or deckplate.

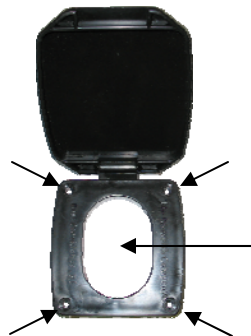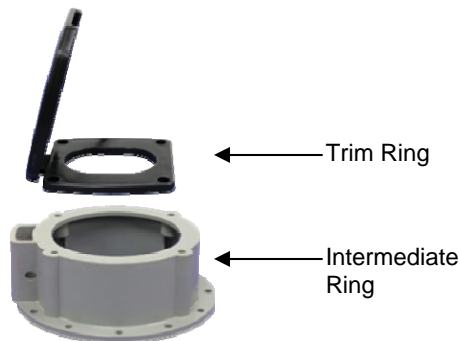

Use trim ring to mark four screw holes and center hole on wall or deckplate.

¹ Note, if your pump is equipped with flapper valves, and your mounting the pump on a vertical wall, be sure to orient the pump so that the outlet is above the inlet. This will ensure that the flapper valves are operating with force of gravity to help ensure proper valve seating in the closed position.

If your pump is equipped with duckbill or umbrella valves, the pump can be oriented in any mounting position.

Question

“How do I install my “M-series” flush mount Guzzler hand pump?”

