




## Sea-Lect® PVC Vinyl Reinforced Hose HO-43 (3/4")

HO-44 (1")

HO-45 (1-1/2")

HO-46 (2")

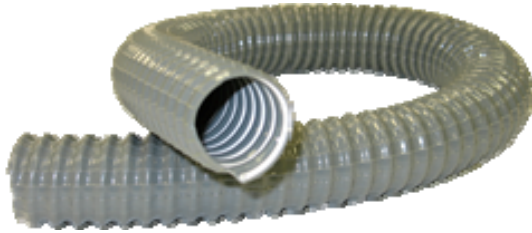

- Lightweight, flexible
- Good chemical resistance
- Popular choice for marine, floor care & general industrial vacuum applications
- Available in 3/4", 1", 1-1/2" and 2" ID
- Cuffs available

### Specifications

<b>Temperature Range</b>	-10°F to 160° F (-23°C to 71°C)
<b>Diameter Range</b>	0.75 in to 2.00 in internal diameter (ID)
<b>I.D. Tolerance</b>	0.00 to +0.125 in
<b>Standard Color</b>	Gray
<b>End Finish</b>	Plain cut (cuffs available)

### Dimensions

Size (Inside Dimension) (in)	Approximate Weight (lbs/ft)	Minimum Centerline Bend Radius (in)	Compression Ratio	Maximum Recommended Negative Pressure (in HG)	Maximum Recommended Positive Pressure (psi)
0.75	0.11	0.875	1.6:1	29	15
1.00	0.15	1.000	1.6:1	29	15
1.25	0.18	1.250	1.6:1	29	15
1.50	0.23	1.625	1.6:1	29	15
2.00	0.35	2.300	1.6:1	29	15

**Note:** Technical data based on testing 2 ft. straight length of hose at 72° F.