




“Guzzler Jr.”

Guzzler® Foot Pump GF-0250S

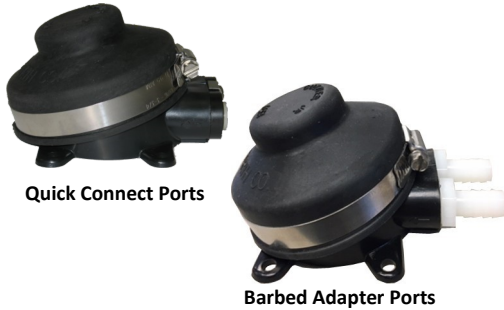

- Ideal for portable handwash stations
- Angled pump face for ease of operation from a standing position
- Accommodates 1/4" - 1/2" hose
- 1.3 GPM
- Available with lightweight, standard or heavy-duty stainless steel spring
- Optional Quick-connect TrueSeal™ fittings for ease of installation
- Umbrella valves to maintain prime

Specifications / Options

Pump Body*	Acrylonitrile-Butadiene-Styrene (ABS)
Clamp Ring	Stainless Steel
Valves*	Umbrella (EPDM)
Diaphragm*	Natural Rubber
I/O Flange QC Cartridges*	PVC*
Internal Spring*	Lightweight (LWS), Standard (STD), Heavy-Duty (HD) (all stainless steel)
Fittings*	Acetal w/Nitrile O-Ring for TrueSeal fittings / Nylon for Barbed fittings

* In contact with fluid

End Connectors



Front view of pump with Quick Connect TrueSeal fittings for ease of use with 3/8" hose



Top view of pump with barbed end fittings available for a range of hose sizes

Performance

Flow Rate	Per minute ¹ : 1.3 Gal (5.8L) Per stroke: 2.8 oz (83 mL)
Max Head	12 ft (3.6 m)
Max Lift	1.0 ft (0.30 m) (LW spring) 2.5 ft (0.76 m) (STD spring) 4.2 ft (1.3 m) (HD spring)
Max Pressure	7 psi (0.4 kg/cm ²)
Max. Service Temp	140°F (60°C)

¹: with std spring

Available Ports

	in	1/4	5/16	3/8	1/2
	cm	0.64	0.79	0.95	1.27
TrueSeal™ Quick Connect Fittings				S	
NPT Female (Tapped)					•
Tapped with Barbed Fittings		•	•	•	•

S Standard • Optional

Valves





Umbrella — Most efficient for pumping clean liquid. Also used for air and vacuum service.

Stainless Steel Spring Options



Lightweight	—	12 lb/in
Standard (Std)	—	18 lb/in
Heavy Duty	—	25 lb/in



	in	cm
A	4-3/8	11.1
B	2-3/4	7.0
C	15°	
D	2-1/8	5.4
E	3-1/2	8.9
F	4	10.2
Mounting Holes	1/4	0.64
Weight	0.55 lb	0.25 kg

TrueSeal™ is a trademark of Parker-Hannifin Corporation.

930 Waterman Avenue
East Providence, RI 02914
(401) 438-1110 • fax (401) 438-2713
toll-free (888) 438-1110 • www.thebosworthco.com

Guzzler® and Sea-lect® are trademarks of The Bosworth Company.



SP-GF-0250S-042524

Guzzler® Foot Pump GF-0250S



Product Model Number Nomenclature Guide

Example: GF-0250S-086-09-2929-10

- Guzzler Foot Pump
- Model style #0250S: Polystyrene Body, Same Side Ports
- Silicone Umbrella Valves
- Natural Rubber Diaphragm
- 3/8" Quick Connect ends
- Standard weight Spring

Guzzler Product	
Option	Code
Foot Pump	GF

Style (Family)	
Option	Code
Polystyrene, Same. Side Ports	0250S

Rubber Boot	
Option	Code
None	0

Valves	
Option	Code
Umbrella (Silicone)	8

Diaphragm	
Option	Code
Natural Rubber	6

GF - **0250S** - **0** **8** **6** - **0** **9** - **29** **29** - **10**

Plunger/Button Assembly	
Option	Code
Delrin Button	0

Clamp Ring	
Option	Code
Band Clamp	9

Option	Code	
	Inlet	Outlet
1/4" Barbed Adapter	07	07
5/16" Barbed Adapter	17	17
3/8" Barbed Adapter	27	27
3/8" Quick Connect	29	29
1/2" NPT Tapped	31	31
1/2" Barbed Adapter	37	37

Internal Spring	
Option	Code
Std Weight SS	10
Lightweight SS	20
Heavy Duty SS	30

